

FLEXIBLE GLOVE WITH LEVEL E CUT RESISTANCE

A flexible, lightweight glove with high cut resistance. 15gg ultra fine high cut resistance liner with a nitrile foam finish palm coating and a reinforced thumb crotch.

FEATURES

- › Cut resistant: Level E (EN 388:2016)
- › Soft and durable for long lasting comfort
- › Resistant to contact heat up to 100°C
- › Breathable liner helps keep hands cool
- › Ergonomically designed for a superior fit
- › Seamless liner prevents irritation
- › Flexible with a high level of dexterity
- › Excellent abrasion resistance allows for long term use
- › Special micro form coating provides excellent dry, wet and oily grip



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Ceramics
- Construction
- Engineering
- Glass
- Plastics

Suitable Applications

- Bodyshop
- Handling Materials with Sharp Edges
- Injection Moulding
- Metal Fabrication

CERTIFICATION



See overleaf for explanation

PRODUCT INFORMATION

MATERIALS	LINER:	15 gauge HPPE, steel & glass fibre, nylon, spandex
	COATING:	Micro foam nitrile
COLOUR	Black/Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY1031	10 pairs per bag 120 pairs per case
8/M	SKY1032	
9/L	SKY1033	
10/XL	SKY1034	
11/XXL	SKY1035	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for high thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement.
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight.
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

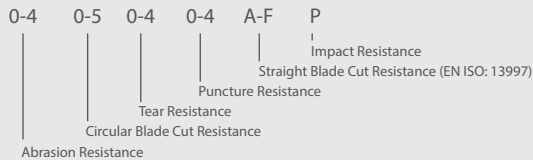


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

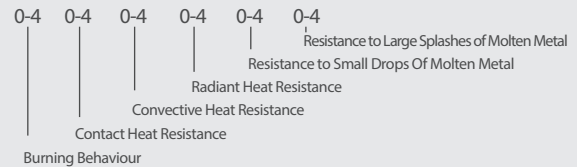

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

